



## Changing a Function to be Assigned to a Register Key

---

Select a function to be assigned to a Register key on the **Control Panel** to suit your requirements. It will be useful to assign frequently-used functions.

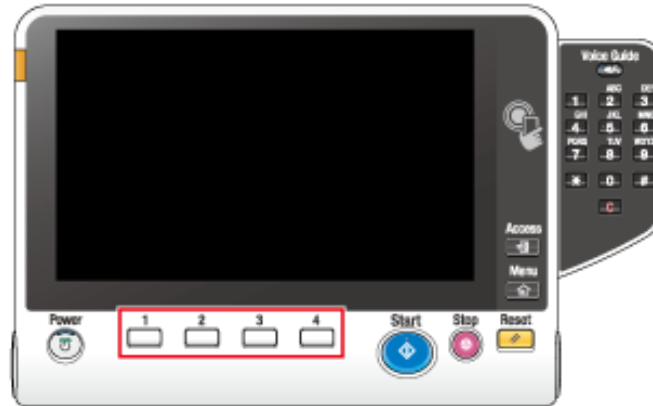


1. Tap [Utility] - [Administrator Settings] - [System Settings] - [Registered Key Settings] - [Hard Key], then tap the key to be assigned to a different function.

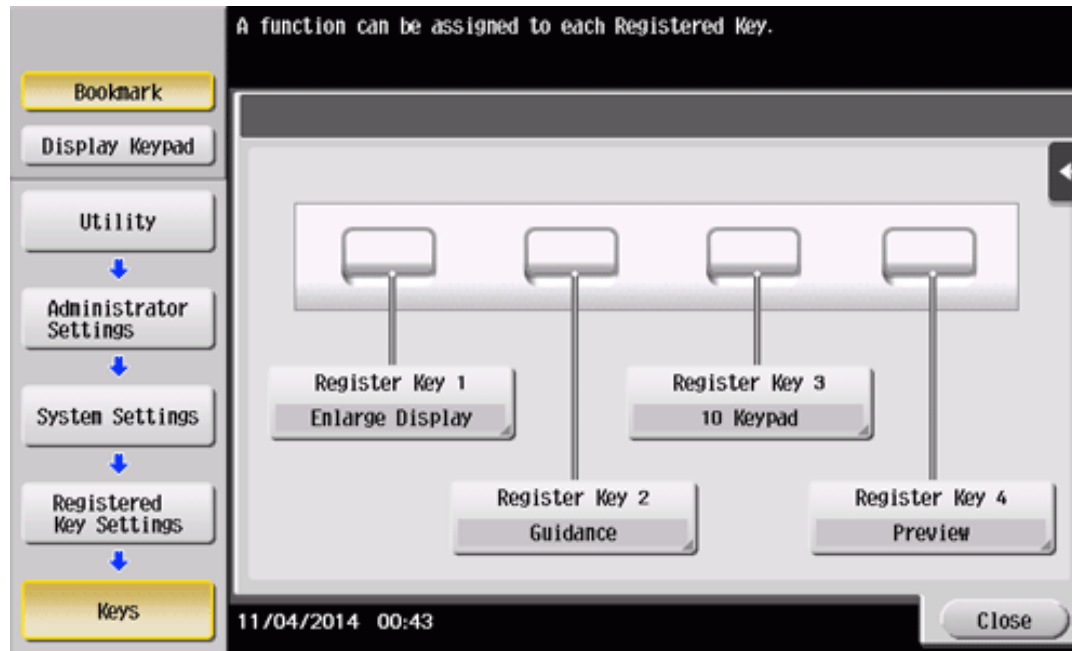

2. Select the desired function, then tap [OK].

Settings	Description
[Copy]	Tap this button to display the main screen in the copy mode.
[Scan/Fax]	Tap this button to display the main screen in the scan/fax mode.
[Fax]	Tap this button to display the main screen in the fax mode. To use this function, the optional <b>Fax Kit</b> is required.
[User Box]	Tap this button to display the main screen in the User Box mode.
[10 Keypad]	Tap this button to display the <b>Keypad</b> on the <b>Touch Panel</b> when entering numeric values such as the number of copies or zoom ratio.

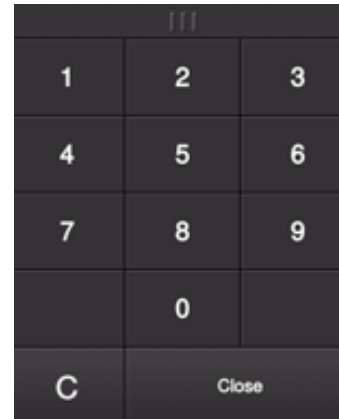

[Utility]	Tap this button to display the [Utility] screen.
[Enlarge Display]	Tap this key to change the display of the <b>Touch Panel</b> to Enlarge Display mode.
[Guidance]	Tap this button to display the Help Menu.
[Interrupt]	Tap this button to interrupt active jobs on this machine and deal with an urgent copy job.
[Preview]	Tap this button to display a finishing image with the current settings on the <b>Touch Panel</b> .
[Slide Menu]	Tap this button to close or open the slide menu.
[Zoom Display]	Tap this button to enlarge the entire panel display up to 200%.



## Tips

- ❖ When the Web browser function is enabled, [Web Browser] can be assigned to a Register key.
- ❖ If the voice guidance, one of the advanced functions, is enabled, [Voice Guide] can be assigned to a Register key.
- ❖ If the serverless pull printing function, which is one of the advanced functions, is enabled, [Serverless Pull Printing] can be assigned to a Register key.